

SITE Easy II -Install Document - Submersible Pressure Sensor

SiteEasy II - Smart Monitoring Made Simple

SiteEasy II is the next-generation smart communication device—offering a cost-effective, high-quality solution for all non-Ex applications. It is engineered for reliable system monitoring in both standard environments and remote locations without access to a fixed power supply.

With SiteEasy II, you benefit from dependable data transmission and ultra-low power consumption. The built-in battery can last up to **10 years** with one transmission per day. Measurements are sent directly to the **SiteInfo** platform, with flexible and configurable reporting intervals.

Installation is simple and secure. The kit includes a **junction box with quick-connect fittings**, allowing fast, tool-free setup.


SiteEasy II is ideal for:

- **Tank level measurement**
- **Industrial sensor integration**
- **Environmental monitoring**
- **Infrastructure surveillance**

When the device is **deactivated**, all measurements and reporting are paused. Upon **activation**, SiteEasy II performs measurements hourly and transmits data wirelessly to the server **three times per day**.


Only approved, quality-assured consumables, including batteries, are provided by **Ajax Solutions**, ensuring long-term reliability and performance

IMPORTANT! Manually gauge the level to check for correct level presentation

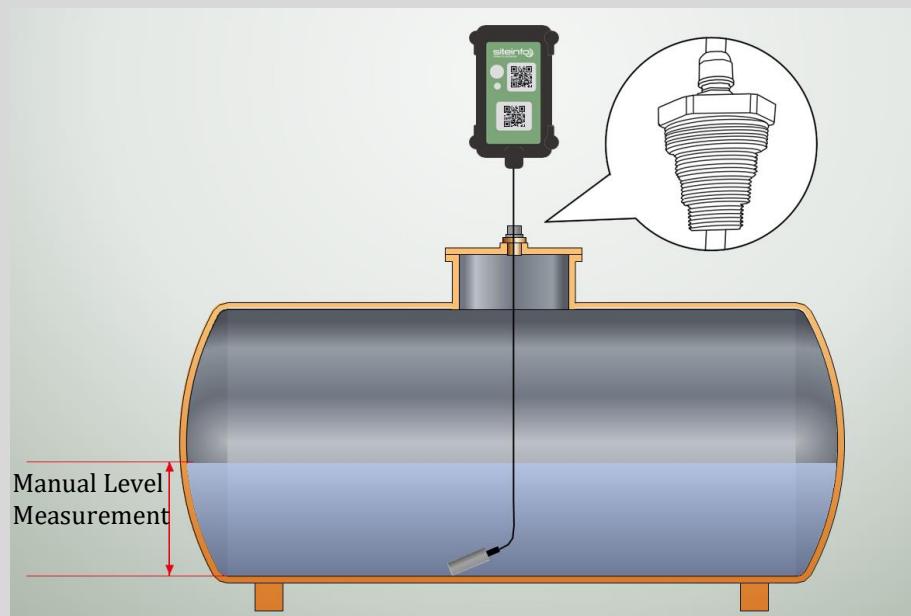


Installing SiteEasy II with Submersible Pressure Sensors


For correct measurement, install SiteEasy II according to the following steps

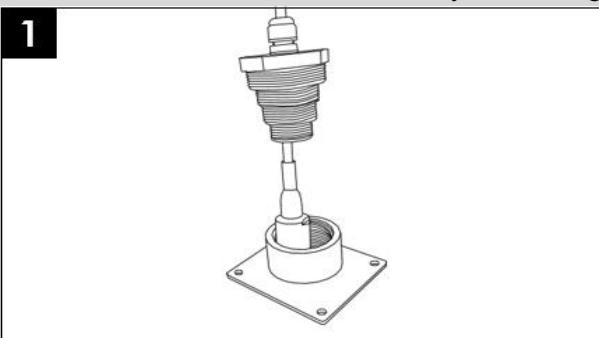


Mount the Multistep Adapter into any accessible port.
Use industry approved sealant

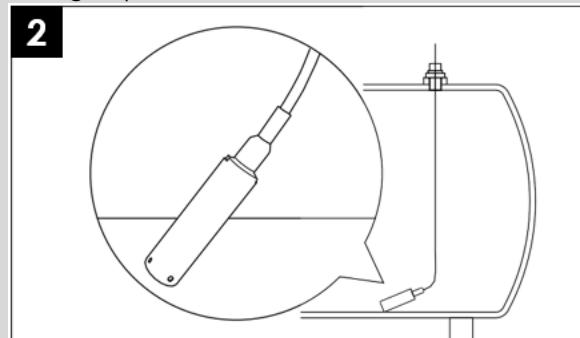

Lower the sensor until it hits the bottom of the tank***If the tank has suspected debris or dirt on the bottom, lift the sensor 50mm off the tank and tighten in position*** Let Ajax Solutions know if this is the case

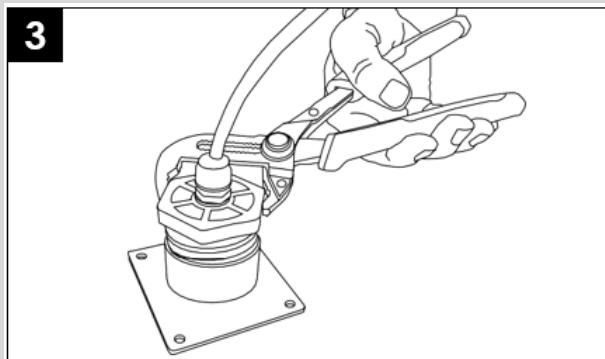

Ensure the Multistep Adapter and cable gland are tightened fully

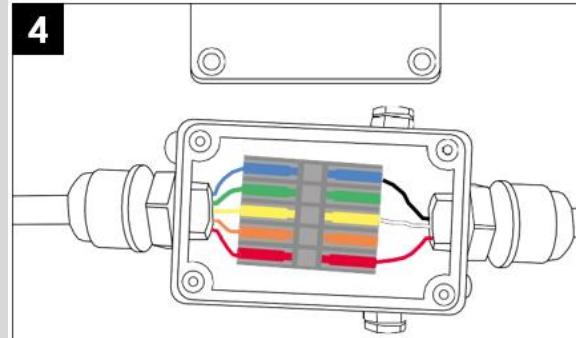

Connect the sensor cables according to the color coding: SiteEasy: Sensor:
 ● Blue (-) ● Black
 ● Yellow (signal) ○ White
 ● Red (+5V) ● Red



During Startup: Press the button until the LED flashes Green.
Release the button



Scan the QR Code with your Smartphone. You will then be sent to the devices page on SiteInfo.se. After about 5 mins, you can verify the level in SiteInfo